

Ordered by: _____
 BILLING: P.O. _____
 Number Bill To: _____
 Address: _____
 City: _____
 Prov: _____ Postal Code: _____ Country: _____
 Phone: (____) _____ Fax: (____) _____

Phone # (____) _____
 Account # _____
 Ship To: _____
 Address: _____
 City: _____
 Prov: _____ Postal Code: _____ Country: _____
 Phone: (____) _____ Fax: (____) _____

Received Date

Male Female

Age _____ Height _____ Weight _____

Leg: Left Right

Patient's Clinical Diagnosis: _____

Surgeries (type/date): _____

Is the patient currently using any assistive device?

Brace/KAFO Cane Crutch
 Walker Wheel chair

What Ankle Control Do You Need This AFO To Provide?

Please check all that apply

Dorsiflexion Plantarflexion
 Inversion Eversion

Ankle/Foot Evaluation (Weight Bearing)

Weight bearing ankle position is:

Neutral Inverted Everted

Ankle movement:

Flexible Rigid

Dorsiflexion & Plantarflexion range of motion:

Full ROM Limited ROM Fused

Casted Position

WB Semi WB Non WB

Cast Mold Corrections

Do not correct casted position
 Please correct the following:
 Forefoot supination Hindfoot inversion
 Forefoot pronation Hindfoot eversion
 Plantar flexion to _____°
 Dorsi flexion to _____°

Bend Knee To 90 Degrees & Check Toe Out

Toe out degrees _____°

Heel height of shoe in inches _____"


Select AFO Style

1. Posterior shell with Becker metal ankle joints attached to foot plate with insert stirrups
2. Anterior shell with Becker metal ankle joints attached to foot plate with insert stirrups
3. Posterior frame that can be solid, semi-rigid, or leaf spring design*
4. Anterior pre-tibial floor reaction frame**

*Can add any thermo-plastic joint to this frame


** May be rigid ankle or add metal joint with stirrup attachment

Non stock ankle joints must be shipped with the appropriate stirrup or molding dummy with the cast mold

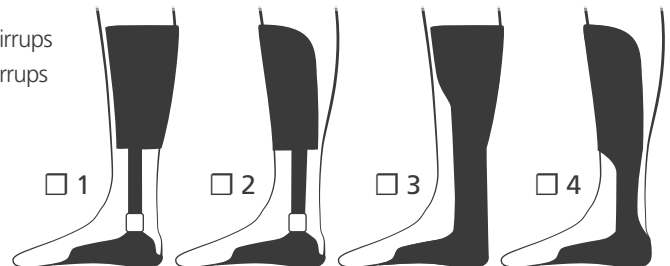

**Indicates additional charges apply*

Total Height of AFO



- 12 inches
- 13 inches
- 14 inches
- 15 inches
- 16 inches
- Other _____

Plastic Shell Material

- Natural Copolymer
- Black Polypro
- Natural Polypro
- Plastic Transfer # (Additional Charge)

AFO Style 3 Trim Line Options

- Solid ankle
- Semi-Rigid Ankle
- Leaf Spring
- Articulated with Thermo-Plastic Ankle Joints

Thermo-Plastic Ankle Joints

- Becker Camber Axis (Model 750-M)
- Becker Oklahoma HD (Model 765-M)
- Proteor Urethane Standard (Model 2C160)
- Proteor Urethane Dorsi Assist (Model 2C162)

Posterior Stops

- No Stops (Full ROM)
- Set 90° with plastic stop
- Becker Motion Control Limiter (Model 655)
- Becker Motion Control Limiter (Model 755)

Traditional Metal Ankle Joints

(Becker modular ankle joints attached with "Y" insert stirrups)

- Double Adjustable (Model SLI-2825-A)
(Ships with springs, pins available on request)
- Dorsi-Flexion (Model 3225-A)
- Dorsi-Flexion One Piece Aluminum (Model 3245)
- Standard Action (Model 3025-A)
(Fused ankle when assembled)

- Set fused ankle position at _____ ° of plantar flexion
- Set fused ankle position at _____ ° of dorsi flexion

Ankle Joint Options

- Set ankle joint M/L to _____ "
(standard spacing is ¼ inch)
- Attach to shoe (Practitioner must send footwear with cast. Footwear must have solid stirrup or split caliper pre-attached with appropriate toe out and M/L)

Shell Padding Material

- No Padding
- Aliplast 1/8" (Soft-White)
- Aliplast 3/16" (Soft-White)
- Aliplast 1/8" (Soft Black)
- Entire Proximal Shell
- Pelite 1/8" (Medium white)
- Plastizote 1/8" (Pink)
- Plastizote 1/4" (Pink)

Foot Plate Selections

- Polypropylene (stiff, heat adjustable)
- Co-Polymer (softer, more flexible, heat adjustable)
- Black Poly Pro (good all around and heat adjustable)
- Trim Proximal to the Metatarsal Heads
- Trim to Toe Sulcus
- Trim to Toes – Outline of full foot required!!!
- Fabricate entire foot plate with no padding
- Line entire foot plate with padding

Foot Plate Padding Material

- Aliplast 1/8" (Soft-White)
- Aliplast 3/16" (Soft-White)
- Aliplast 1/8" (Soft Black)
- Pelite 1/8" (Medium white)
- Plastizote 1/8" (Pink)
- Plastizote 1/4" (Pink)

Metal Bar Finishing Options

- Gloss Black
- Bengal White
- Bengal Silver
- Bengal Yellow
- Sparkle Red
- Electric Blue
- Candy Green
- Violet
- Sky Blue
- Argento Grey
- Powder Coat Red
- Powder Coat Blue
- Powder Coat Grey
- Sparkle Copper

Plastic Transfer

- Carbon Braid (Model P-1063)
- Tornado (Model P-1013)
- Military Camo (Model P-1025)
- Ice Age 2 (Model P-1050)
- American Flag (Model P-1053)
- Light Pine (Model P-1071)

Additions (Additional Charge Will Apply)

- Additional Strap** (Set _____ " Above Ankle Center)
- Anterior
- Posterior
- Both

Kydex Shell

- Anterior
- Posterior
- Specific Location _____

Dorsal Foot Strap

- Lateral Strap With Medial Chafe
- Lay Over Strap With Velcro

Notes: _____

